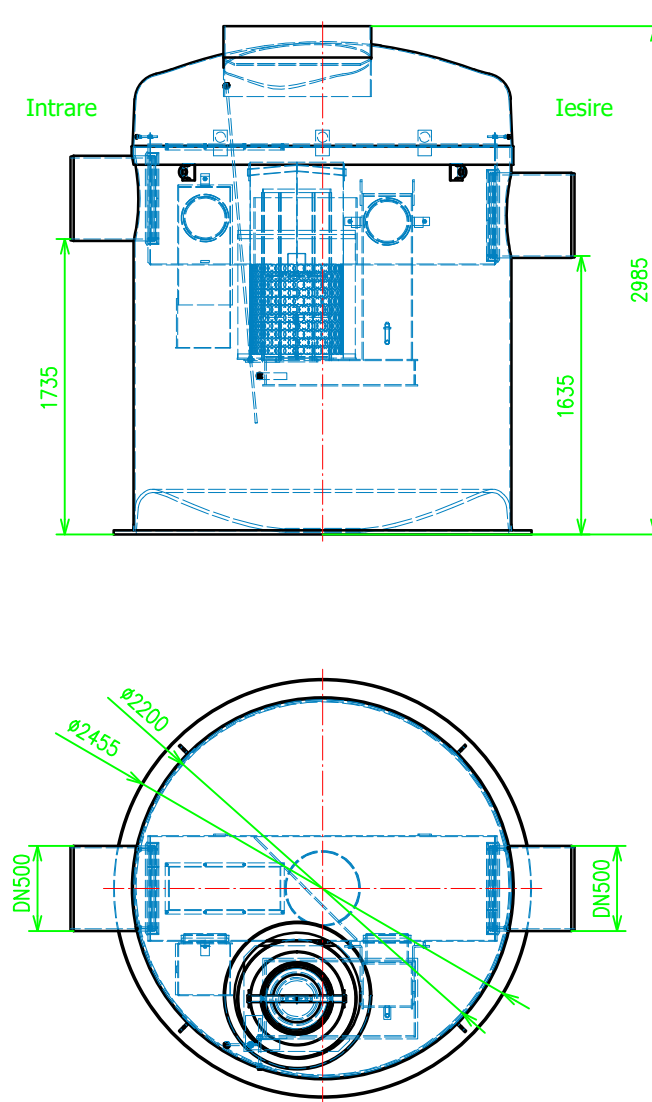
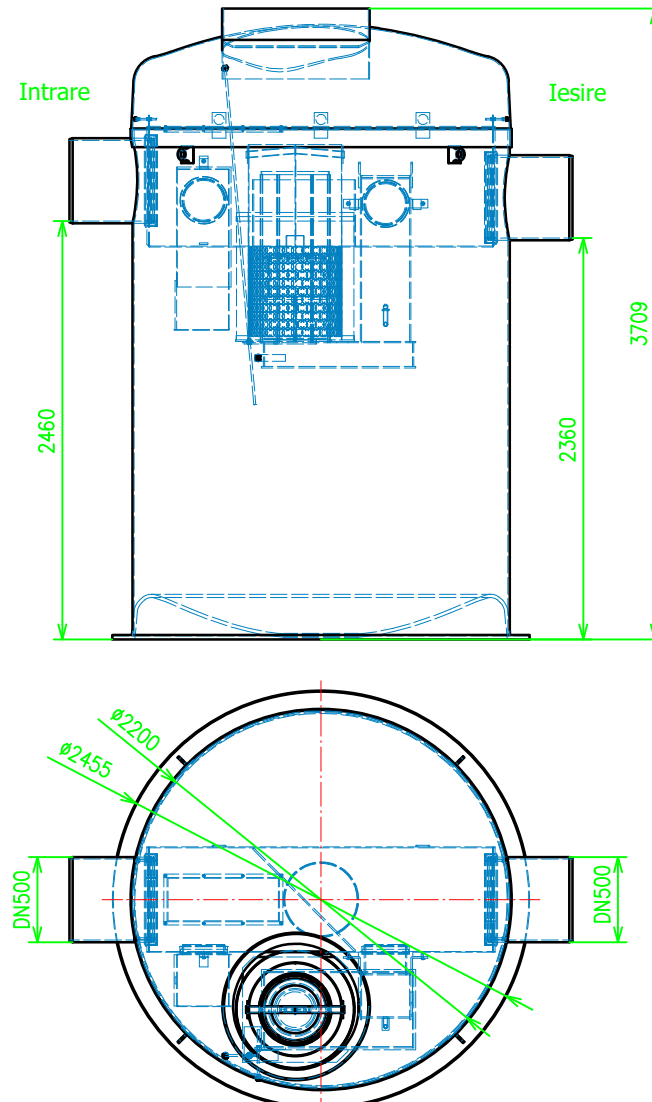
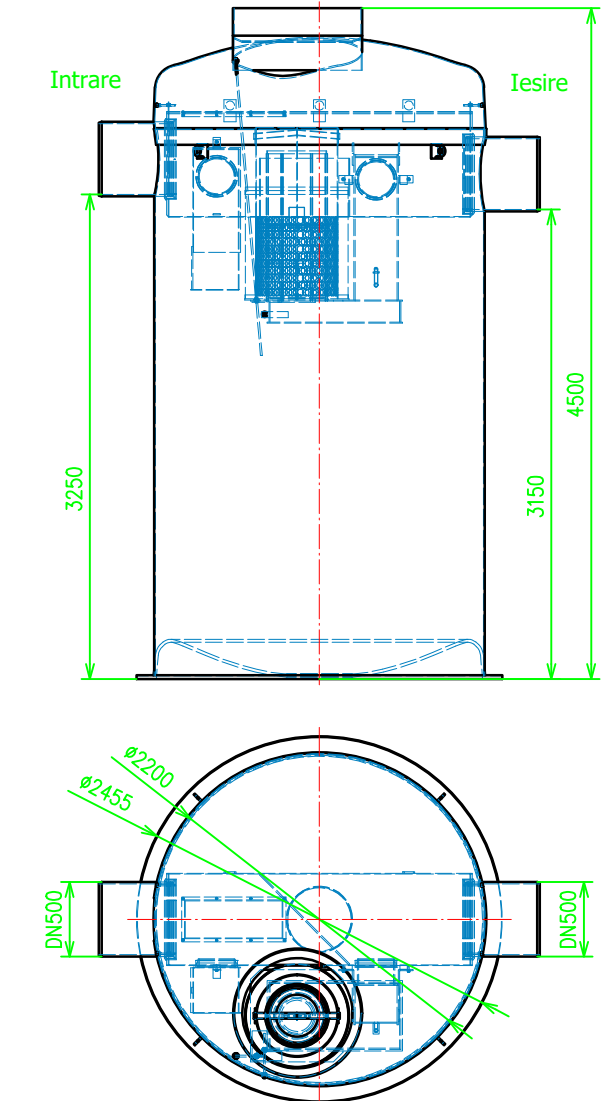



Oleopator-bypass 30/300/3000	Oleopator-bypass 30/300/6000	Oleopator-bypass 30/300/9000	
<p>Art. no. <b>12556.41</b></p>  <p>Front view dimensions: Total height 2985, inlet height 1735, outlet height 1635. Top view diameters: <math>\varnothing 2200</math>, <math>\varnothing 2455</math>, DN500.</p>	<p>Art. no. <b>12557.41</b></p>  <p>Front view dimensions: Total height 3709, inlet height 2460, outlet height 2360. Top view diameters: <math>\varnothing 2200</math>, <math>\varnothing 2455</math>, DN500.</p>	<p>Art. no. <b>12558.41</b></p>  <p>Front view dimensions: Total height 4500, inlet height 3250, outlet height 3150. Top view diameters: <math>\varnothing 2200</math>, <math>\varnothing 2455</math>, DN500.</p>	
<p>Numele sistemului: ACO Oleopator G by-pass</p>			
<p>Denumirea plansei: ACO Oleopator G by-pass - clasa de sarcini A15 - D400</p>			<p>Data: 06/2021</p>
<p>Nume fisier: Oleopator G by-pass NS30/300.dwg</p>			<p>Revizia nr. 0</p>
<p>Caracteristici tehnice</p> <p>Instalatie de separare lichide usoare, din plastic armat cu fibra de sticla, prevazut cu instalatie de by-pass, conform SR EN 858.</p> <p>Instalatie de separare prevazuta cu: element de coalescenta demontabil, flotor de siguranta, racord prelevare probe, elemente interne din PEHD.</p>		<p>Desenat Alexandra Alexa</p> <p><b>ACO srl</b></p> <p>Departamentul tehnic</p> <p>www.aco.ro                      tehnic@aco.ro</p>	